




available:




C1150
1150 kg




C1200
1200 kg




C1300
1300 kg




C1350
1350 kg



C1400
1400 kg




C1500
1500 kg




C1600
1600 kg





SCARICO A SINISTRA
LEFT DOWNLOAD

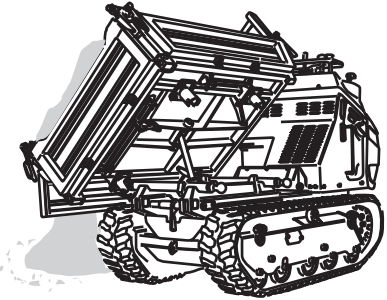


SCARICO A DESTRA
RIGHT DOWNLOAD

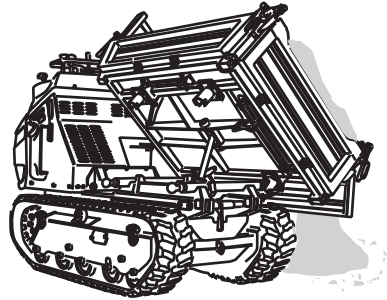


SCARICO FRONTALE
FRONT DOWNLOAD

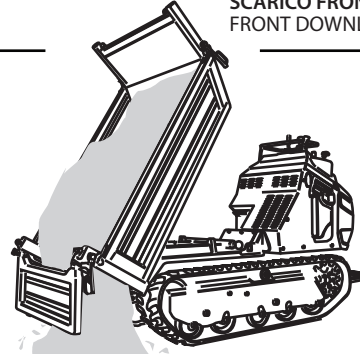


CAMBIO VERSO DI RIB.
the tipping jack




SUPPORTO SICUREZZA
safety support




APERTURA AUTOMATICA
automatic opening




SPONDE RIMOVIBILI
removable






SOLLEVABILE
liftable



TRASPORTABILE
transportable



QUICK ATTACH

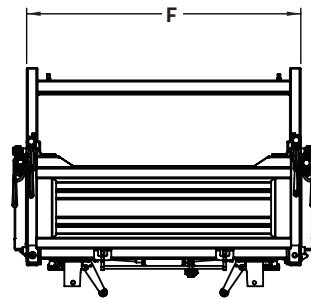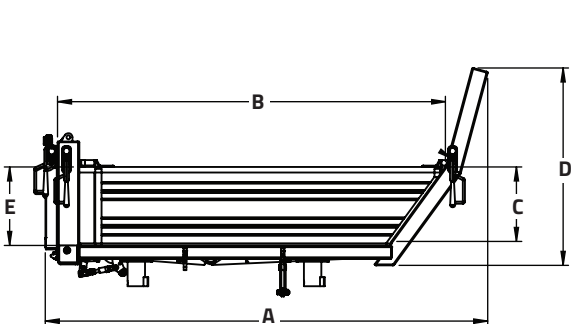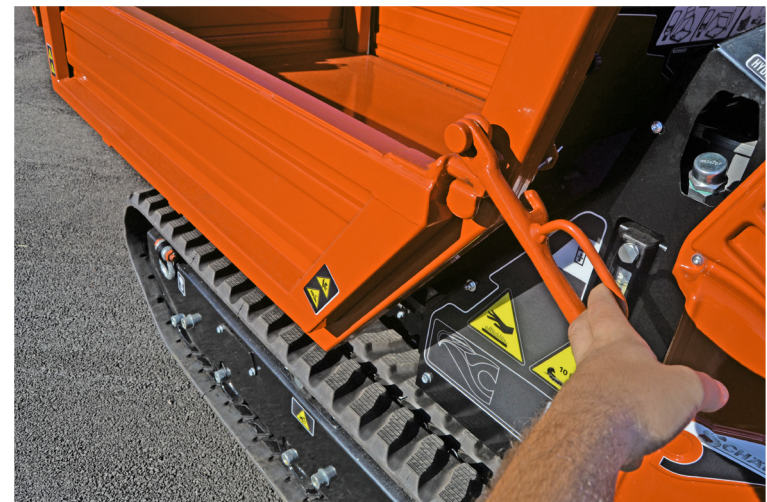

C1150 - C1200		C1300 - C1350 - C1400 - C1500 - C1600	
mm	in	mm	in
A	-	A	1630
B	-	B	1429
C	-	C	274
D	-	D	727
E	-	E	289
F	-	F	1010

C1150 - C1200	
Capacità/Capacity:	
Raso/Struck	0,36 m ³
Colmo/Heaped (CECE)	0,49 m ³
Colmo/Heaped (SAE)	0,61 m ³

C1300 - C1350 C1400 - C1500 - C1600	
Capacità/Capacity:	
Raso/Struck	0,39 m ³
Colmo/Heaped (CECE)	0,53 m ³
Colmo/Heaped (SAE)	0,67 m ³